

STREAMLINE DESIGN & DEPLOYMENT

Altronix TRIJVE



Altronix TREVE

Easily combine Altronix power and accessories with access controllers from the industry's leading manufacturers - Reducing installation and labor costs!

utttttte

- Trove streamlines access control design and deployment, increasing profits and ROI.
- Removable backplanes allow you to configure and test prior to on-site installation.
- Trove enclosures are available in different sizes and configurations to meet your project scope – including wall mount, rack mount and outdoor models.
- Pre-configured kits are available with power distribution, finger duct and wire assemblies.
- Combine both access and intrusion modules for various brands - all in one enclosure, for added value!
- Optional LINQ[™] Networked Power Management Technology allows you remotely monitor, control and report power/diagnostics, streamlining service and maintenance operations by leveraging the network.
- Altronix products are TAA & NDAA compliant
- Our free online Trove System Design tool simplifies the design and product selection process: <u>www.altronix.com/system_design_tools/trove</u>

Altronix®

TRIJVE Enclosure Options



TROVE2

Knockouts accommodate up to 2.0" conduit
Accommodates four (4) 12VDC/12AH batteries
Dimensions: 27.25" H x 21.75" W x 6.5" D

TROVE3

- Knockouts accommodate up to 2.0" conduit

- Accommodates four (4) 12VDC/12AH batteries Dimensions: 36.12" H x 30.12" W x 7.06" D




718.567.8181 | info@altronix.com -

Altronix® TRICVE[™] Access and Power Integration



Power System Compatible Altronix Model **Description/Sub-Assemblies** Capacity **INNER RANGE Models** Supply/Charger(s) Trove 2 Series - Accommodates Altronix Distribution with Controllers Enclosure + Backplane TROVE2IR2 N/A 8-Doors TIR2 N/A Backplane only Trove 2 Series Pre-assembled Kits **T2IRK78S** AL1024ULXB2 Integriti ACMS8, VR6, PDS8 T2IRK7F8S eFlolw104NB 8-Doors T2IRK78SD AL1024ULXB2 ACMS8CB, VR6, PDS8CB T2IRK7F8SD eFlolw104NB 220VAC units available upon request, add suffix "V" (T2IRK78SV)

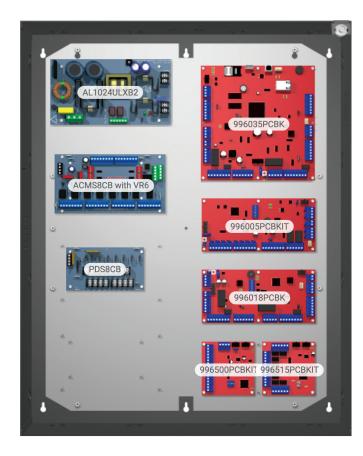


T3IRK7716SD 16-Door Access System with Power





Access and Power Integration

Altronix Model	Power Supply/Charger(s)	Description/Sub-Assemblies	System Capacity	Compatible INNER RANGE Models
		Trove 3 Series - Accommodates Altronix Distribution with Contr	ollers	
TROVE3IR3	N/A	Enclosure + Backplane	16-Doors	
TIR3	N/A	Backplane only	10-00015	
		Trove 3 Series Pre-assembled Kits		
T3IRK7716S	2-AL1024ULXB2			Integriti
T3IRK77F16S	2-eFlow104NB	2-ACMS8, 2-VR6, 2-PDS8	16-Doors	
T3IRK7716SD	2-AL1024ULXB2		10-00015	
T3IRK77F16SD	2-eFlow104NB	2-AUIVIJUUD, 2-VNO, 2-VDJOUD		
220VAC units available upon request, add suffix "V" (T3IRK77F16SV)				

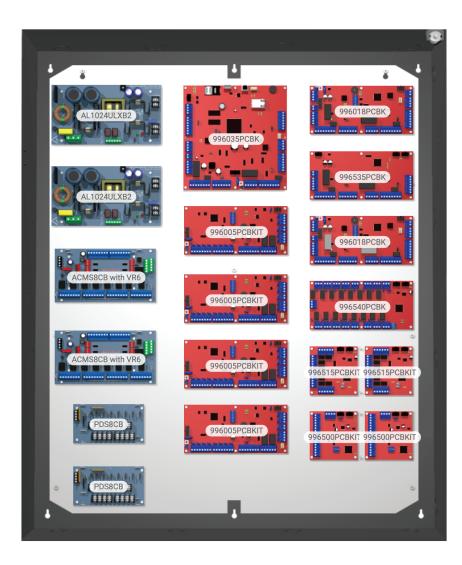

T3IRK7716SD 16-Door Access System with Power



\Lambda Altronix®

Power Supply/Chargers for TROVE Series

Altronix Model	Total Output Power	Number of Outputs	Built-in Battery Charger	Input	Dimensions (L x W x H)
ULXB Series Power Supply/Chargers					
AL400ULXB2	12VDC @ 4A or 24VDC @ 3A				4.5" x 7.1" x 1.44"
AL600ULXB	12VDC or 24VDC @ 6A	- 1 SLA -			4.5" x 7.1" x 2.6"
AL1012ULXB	12VDC @ 10A		115VAC	4.5" x 7.5" x 2.25"	
AL1024ULXB2	24VDC @ 10A				4.5" x 8.4" x 1.95"
AL400ULXB2V	12VDC @ 4A or 24VDC @ 3A		SLA	220VAC	4.5" x 7.1" x 1.44"
AL600ULXB220	12VDC or 24VDC @ 6A				4.5" x 7.1" x 2.6"
AL1012ULXB220	12VDC @ 10A				4.5" x 7.5" x 2.25"
AL1024ULXB2V	24VDC @ 10A				4.5" x 8.4" x 1.95"
Tango PoE Driven Power Supply/Charger					
Tango1B	12VDC up to 6.25A (75W) and 24VDC up to 3A (75W)	2	LiFeP04	90W 802.3bt PoE	7.625" x 4.125" x 1.25"



PoE Power Sourcing Equipment

Altronix Model	Description	
NetWay1BT	Single Port 802.3bt Converter/Injector - 115/230VAC Input, 90W Output	
NetWay8BT	Nay8BT 8-Port Managed 802.3bt Midspan Injector supplies 90W per port (480W total power)	



718.567.8181 | info@altronix.com

cULus

Altronix®

Power Distribution / Sub Assemblies for TROVE Series -

Altronix Model	Description	Number of Outputs	Dimensions
ACM4 / ACM4CB	4-Output Access Power Controller	4	5.175" x 3.36" x 1.25"
ACM8 / ACM8CB	8-Output Access Power Controller	8	8" x 4.5" 1.25"
ACMS8 / ACMS8CB	Dual Input, 8-Output Access Power Controller	8	8" x 4.5" 1.25"
ACMS8K1 / ACMS8CBK1	Dual Input, 8-Output Access Power Controller and Voltage Regulator Kit	8	8" x 4.5" 2.125"
ACMS12 / ACMS12CB	Dual Input, 12-Output Access Power Controller	12	8" x 4.5" 1.25"
LINQ8PD / LINQ8PDCB	Dual Input, 8-Output Network Power Distribution Module - Control, Monitor and report Power/Diagnostics	8	5.5" x 3.625" x 1.25"
LINQ8ACM / LINQ8ACMCB	Dual Input, 8-Output Network Power Access Power Controller - Control, Monitor and report Power/Diagnostics	8	8"x 4.5"x 1.25"
LPD	Low Power Disconnect Module (12/24VDC input)	N/A	2" x 2.75" 1"
M0M5	5-Output Power Distribution Module with Fire Alarm Interface	5	5.25" x 3.5" x 1"
NETWAY5A	5-Port Switch Board Facilitates Network Drops (10/100)	5	5.625" x 3.5" x 1"
NETWAY5B	5-Port Switch Board Facilitates Network Drops (10/100/100)	5	5.625" x 3.5" x 1"
NETWAY5P	5-Port Hardened PoE+ Switch Board	5	5.6" x 3.6" x 0.75"
NETWAY5PQ	5-Port Hardened Managed PoE+ Switch Board	5	5.6" x 3.6" x 0.75"
PD4UL / PD4ULCB	4-Output Power Distribution Module	4	5.21" x 3.25" x 1"
PD8UL / PD8ULCB	8-Output Power Distribution Module	8	5.21" x 3.25" x 1"
PDS8 / PDS8CB	Dual Input, 8-Output Power Distribution Module	8	5.375" x 3" x 1"
PDS8K1 / PDS8CBK1	Dual Input, 8-Output Power Distribution Module and Voltage Regulator Kit	8	5.375" x 3" x 2"
PD16W / PD16WCB	16-Output Power Distribution Module	16	5.875" x 6" x 0.95"
PDS16 / PDS16CB	Dual Input, 16-Output Power Distribution Module	16	5.375" x 3" x 1"
VR6	Stackable Voltage Regulator Converts a 24VDC input to 5VDC or 12VDC at 6A	1	5.375" x 3" x 1"
VR10	Stackable Voltage Regulator Converts a 24VDC input to 5VDC or 12VDC at 10A	1	5.375" x 3" x 1"



Stackable sub-assemblies save valuable enclosure space, allowing for more power distribution and access controllers.



Altronix[®]

Optional Accessories for TROVE Series -

Altronix Model	Description				
BL3	18" Battery Leads (black and red)				
BL4	8" Battery Series Jumper (yellow)				
BL6	68" Battery Leads (black and red)				
BR1	Add-on mounting bracket. Mount additional Altronix sub-assemblies to the enclosure's side wall.	BTL125			
BT126	12VDC / 7AH Rechargeable Battery	BILIZS			
BT1212	12VDC / 12AH Rechargeable Battery				
BTL125	Rechargeable 12V Lithium Iron Phosphate (LiFePO4) Battery				
CLK1	Thumb Lock. Fits Trove1, Trove2 and Trove3 enclosures.	CLK1			
DNP1	Altronix DIN Rail Adapter Plate accommodates the following sub-assemblies: ACM4(CB, ACM8(CB), ACM8(CB), ACMS8(CB), ACMS12(CB), LINQ8PD(CB), LINQ8ACM(CB), MOM5, NETWAY5A, NETWAY5B, NETWAY5P, NETWAY5PQ, PD4UL(CB), PD8UL(CB), PDS8(CB), PDS16(CB)				
GB1	Altronix Adapter Plate for Genetec Synergis Cloud Link (For Mercury and HID/Vertx)				
MM4	Mounting Magnets. 26 lbs. holding force. Pack of 4.	DNP1			
MM8	Mounting Magnets. 26 lbs. holding force. Pack of 8.				
MM12	Mounting Magnets. 26 lbs. holding force. Pack of 12.				
MM24	Mounting Magnets. 26 lbs. holding force. Pack of 24.				
PSC1	Power Supply Protective Cover (Includes standoffs)				
RSB1	Rocker Switch with Bracket - Includes single Master Power ON/OFF Switches and Wires	· ·			
RSB2	Rocker Switches with Bracket - Includes two (2) Master Power ON/OFF Switches and Wires	PSC1			
SPACER1	5/8" Nylon female/female spacers (standoffs) with 6/32 screws. Pack of 25.				
SPACER3	5/8" Aluminum female/female spacers (standoffs) with 6/32 screws. Pack of 25.				
SPACER4	5/8" Nylon male/female spacers (standoffs) with 6/32 screws. Pack of 25.				
SPACER5	5/8" Nylon snap-on spacers (standoffs) with 6/32 screws. Pack of 32.	*			
SPACER6	1" Aluminum female/female spacers (standoffs) with 6/32 screws. Pack of 4.				
SPACER7	5/8" Aluminum male/female spacers (standoffs) with 6/32 screws. Pack of 25.	RSB2			
SPACER8	1" Nylon female/female spacers (standoffs) with 6/32 screws. Pack of 4.				
SPACER9	5/8" Aluminum spacers (standoffs) with 4/40 screws. Pack of 8.				
WM5	Magnetic cable tie mount. Accommodates standard zip ties. 16 lbs. holding force. Pack of 5.				
WM10	Magnetic cable tie mount. Accommodates standard zip ties. 16 lbs. holding force. Pack of 10.	WM5			
WM25	Magnetic cable tie mount. Accommodates standard zip ties. 16 lbs. holding force. Pack of 25.				
WM100	Magnetic cable tie mount. Accommodates standard zip ties. 16 lbs. holding force. Pack of 100.				



Rev. 124





140 58th Street | Brooklyn, NY 11220 | 718.567.8181 | info@altronix.com