


## PD16WCB

### UL Listed Power Distribution Module

Altronix PD16WCB UL Listed Sub-Assembly power distribution module is designed to convert a single AC or DC input into sixteen (16) PTC protected Class 2 Rated power-limited outputs.

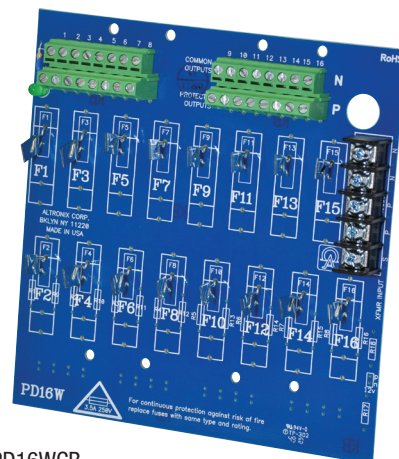

PD16WCB

### Specifications

#### Input

Voltage Range 12VDC or 24VDC, up to 10A or  
24VAC or 28VAC, up to 12A

#### Outputs

Sixteen (16) PTC protected Class 2 Rated power-limited outputs (auto-resettable)

2A per output max.

Total output current should not exceed max current rating of power supply employed

PTCs are rated @ 2A/250V

#### Indicators (LED)

DC Output Power LED

### Agency Listings

#### UL:

UL294 Access Control

UL603 Burglar Alarm

UL1481 Fire Alarm

#### cUL:

General Signaling Equipment Evaluated to

CSA Standard C22.2 No.205-M1983

Power Supplies for Burglar Alarm Systems ULC-5318-96

### Physical and Environmental

#### Dimensions (L x W x H)

6" x 5.875" x 0.95" (152.4mm x 149.2mm x 24.1mm).

Product Weight 0.4 lb. (0.18 kg)

Shipping Weight 0.5 lb. (0.23 kg)

#### Temperature

Operating 0°C to 49°C (32°F to 120°F)

Storage -20°C to 70°C (-4°F to 158°F)

Relative Humidity 85% +/-5%

Mounting hardware included


### Lifetime Warranty

**PD16WCB**

UL Listed Power Distribution Module

**Board Dimensions (L x W x H) and Drawing**

6" x 5.875" x 0.95" (152.4mm x 149.2mm x 24.1mm)

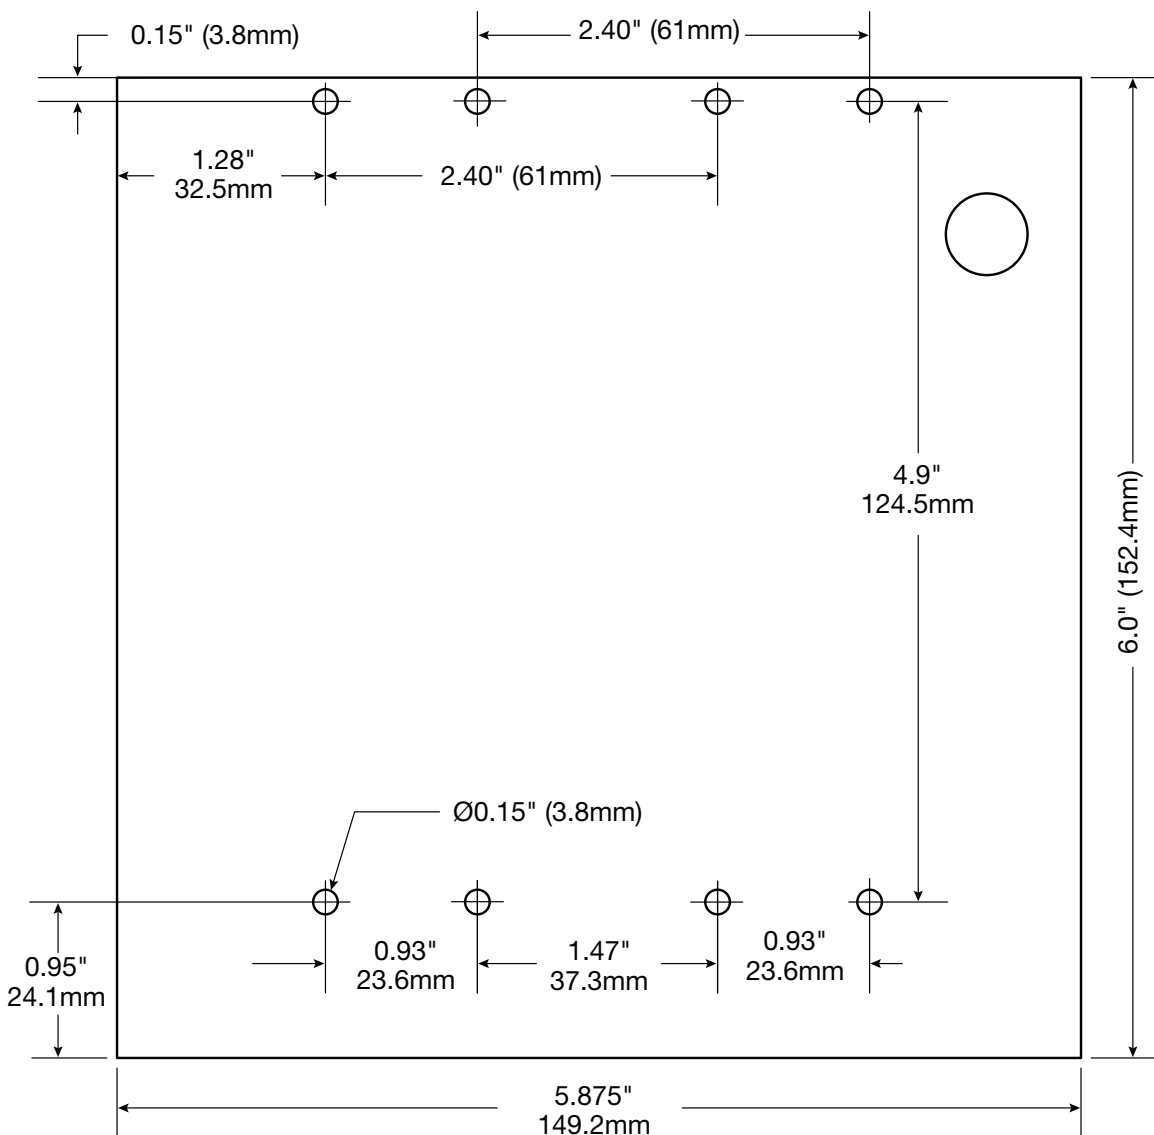**Lifetime Warranty**

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com